


CXI – CX Datalogger USB Interface

CXCOM – Application Software



- Datalogger function, included in every CX/CXN charge controller
- CXI and CXCOM collect and record system information
- Allows all information about the battery state of charge history to be easily gathered, stored and interpreted
- System analysis, provides tips for user to fix basic problems
- Data at a glance, helps system installer to detect and analysis problem
- Easy installation by plug and play

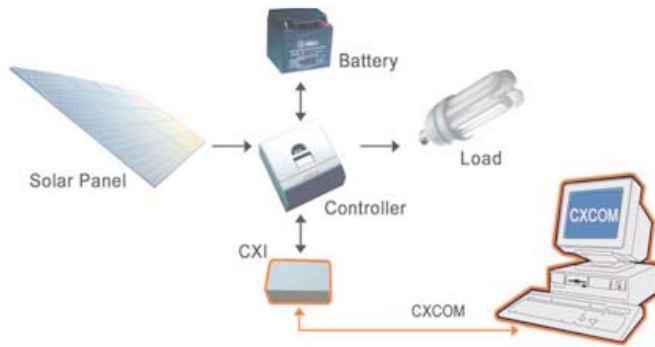

With a USB plug, CXI connects the CX/CXN charge controller with computer. It converts signals from CX/CXN into a form which a computer can recognize. CXCOM allows CX/CXN charge controller to communicate with computer. It displays current state and historical data of the system up to one year. It also allows modification of the controller setting and calibration. Information can be saved in Excel and text file.

System requirements:

- Intel 386 or higher (or equivalent)
- Windows 98/me/2000/xp/NT
- screen solution:1024*768
- 4MB RAM
- 1 USB port

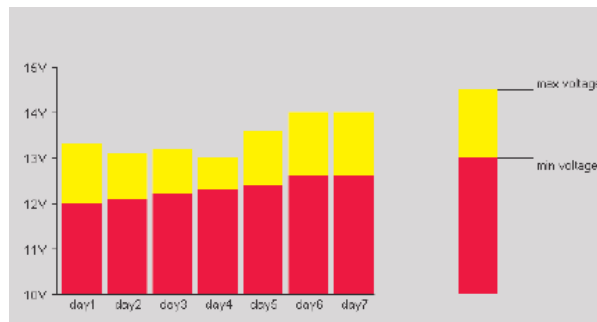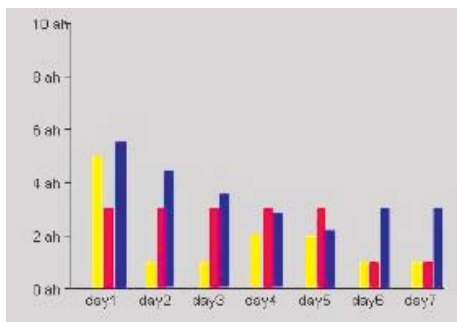

Battery Voltage (Max. and Min.) and Ampere hours shown by graphics

Phocos AG, Germany
info@phocos.com

Phocos China Ltd., China
Info-china@phocos.com

Phocos India Solar Pvt. Ltd., India
Info-india@phocos.com

Phocos Latin America S.R.L, Bolivia
Info-latinamerica@phocos.com

Phocos Rep. Office Australia, Australia
Info-australia@phocos.com

Phocos Rep. Office Brazil, Brazil
Info-brazil@phocos.com

Phocos Rep. Office Eastern Africa, Kenya
Info-easternafrica@phocos.com

Phocos Eastern Europe S.R.L., Romania
Info-easterneurope@phocos.com

Phocos SEA Pte Ltd, Singapore
Info-sea@phocos.com

Phocos Rep. Office South Africa
Info-sadc@phocos.com

Phocos Tunisia
Info-maghreb@phocos.com

Phocos USA
Info-usa@phocos.com